

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 820 004 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication

21.01.1998 Bulletin 1996/04

51 Int. Cl. G06F 3/12, G06K 15/00

(31) Application number 97305382.0

(22) Date of filing 18.07.1997

(64) Designated Contracting States

AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

Designated Extension States

AL LT LV RO SI

- Miyashita, Takeshi
Suwa-shi, Nagano-ken (JP)
- Nozawa, Shinji
Suwa-shi, Nagano-ken (JP)
- Tanaka, Koji
Suwa-shi, Nagano-ken (JP)
- Sumi, Shinji
Suwa-shi, Nagano-ken (JP)

(30) Priority 19.07.1996 JP 190849/96

(71) Applicant SEIKO EPSON CORPORATION
Shinjuku-ku, Tokyo (JP)

(74) Representative Sturt, Clifford Mark et al
J. MILLER & CO.
34 Bedford Row,
Holborn
London WC1R 4JH (GB)

(72) Inventors

- Suzuki Tetsuya
Suwa-shi, Nagano-ken (JP)
- Murata, Sunao
Suwa-shi, Nagano-ken (JP)

(54) Print systems, printer driver and printer

(57) A printer driver is provided in a host computer. When a print job occurs, the printer driver automatically selects the format of a printing command to be output to a printer. As the command format, there are available two kinds of format: a high-level printer control language format (for example, PDL) and an intermediate code format expressed in an intermediate language.

When the latter format is selected, the printer driver converts a plotting command from an application to an intermediate code and then outputs the intermediate code to the printer. The printer converts the intermediate code to another intermediate code specific to the printer by a very simple processing, and then develops the intermediate code to a bit image, thereby enabling high speed printing.

FIG. 1

100 PRINTER

200 APPLICATION

300 PRINTER DRIVER
400 PAGE PRINTER

Description

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a print system including a host computer and a printer connected with the host computer and, in particular, to an improvement in a print speedup technology suitable for a print system using a page printer.

Description of Related Art

In a page printer, due to the structure of a print engine thereof, after printing has started, it is impossible to stop the feeding of print sheets or to return the print sheets in the reverse direction in the middle of the printing. Also, even when the page printer is not capable of having a bit map memory corresponding to one page, printing must be executed at a speed near the maximum performance of the print engine.

In order to realize the above-mentioned functions in the prior art, a controller employed in the page printer includes a high-power CPU and a mass storage memory and, in this respect, the controller is more powerful than the host computer.

Also, the controller of the page printer does not translate one or more plotting commands from a host computer directly into one or more bit map images but allows an intermediate code to intervene in the middle of translation from the plotting commands to the bit map images, thereby being able not only to simplify the next and following operations of translation into the bit map images but also to facilitate the conversion of the plotting commands free from the detailed characteristics of the print engine, so that the efficiency of the whole print process can be improved. Therefore, in the controller of the page printer, a module which interprets a plotting command and creates an intermediate code corresponding to the plotting command is usually separated from a module which interprets the plot, i.e., steps in the intermediate code and the bit map image, to the print engine.

However, since the host computer is more powerful than the controller, and since the controller is more powerful than the print engine, the efficiency of the whole print process is consequently lowered. In particular, for plotting commands to be supplied to a printer has also increased greatly. As a result, the CPU power and memory capacity of the printer have increased with the result that a large amount of power and a large amount of memory are required for the printer itself. Also, since the host computer

printer but also in a system which uses a printer of another type such as a serial printer or the like.

In view of the above, it is an object of the invention to provide an improved print system which can improve the throughput of the whole system even without enhancing the throughput of a printer itself.

SUMMARY OF THE INVENTION

In attaining the above object, according to the invention, there is provided a print system which includes a host computer and a printer connected with the host computer. In the present print system, the host computer includes a printer driver which is used to generate print job data including one or more plotting commands to be given to the printer, while the printer driver further includes intermediate level job data generating means used to generate intermediate level print job data including plotting commands at least part of which are expressed in the format of a first intermediate code. Also, the printer includes intermediate code conversion means which is used to receive intermediate level print job data and converts the plotting commands of the intermediate level job data into a second intermediate code, and third conversion means which is used to convert the second intermediate code into bit image data for printing.

According to the present print system, in the host computer, part or all of the plotting commands are converted to the intermediate code format before being transmitted to the printer. Therefore, in the printer, there can be omitted a processing which converts the plotting commands written in a high-level language to the intermediate code. In this manner, according to the invention, since the intermediate code generation processing which has been conventionally performed only in the printer can be shared by the host computer, especially when the memory or CPU of the host computer has capabilities to spare, and the printing speed of the printer can be enhanced.

The printer driver further may include a high-level data generation means used to generate high-level print job data in which the plotting commands are written, and the printer may include a high-level print job data generation means and a high-level job data generation means and the high-level job data generation means. In this case, the printer further may include graphics elements which are used to convert the plotting commands expressed in the high-level print job data into a high-level print job data.

elate that selection of one of the two operation modes can be decided automatically. In a preferred embodiment of the invention, the operation mode can be selected automatically by synthetically considering the kinds of application programs, the capabilities of the printer, and the capabilities of the host computer.

Also, when selecting the operation mode automatically, the operation mode may be decided according to a print job unit, or a page unit, a band unit, or a plotting command unit, or an application program unit.

The print job data can also be formed such that it includes specification information for specifying which plotting commands are converted to the intermediate code. For example, when all the plotting commands are converted to the intermediate codes, the print job data can declare in the head portion thereof to the effect that all the plotting commands are converted to the intermediate codes. Also, when only the specific pages, specific bands, or specific commands are converted to the intermediate codes, the declaration to this effect can be set in the head of the specific pages, bands, or commands. Such declaration, that is, such specification information, can be described in the printer control language.

From the viewpoint of relieving the processing burden of the printer, it is preferred that the first intermediate code to be generated by the printer driver and the second intermediate code to be generated by the printer be in the same format. However, there is a possibility that, since the roles of the two intermediate codes are different from each other, they can be different in the details thereof. For example, the first intermediate code must include bit image data on the individual characters to be plotted and on the individual images to be plotted. On the other hand, in an ordinary printer, such bit image data is managed at a different storage location from the intermediate code and, therefore, the second intermediate code does not include such bit image data.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of the overall structure of a print system according to the invention.

Fig. 2 is a block diagram of the printer control language.

Fig. 3 is an exemplary view of an example of job data.

Fig. 4 is a block diagram of the functional structure of a printer driver provided in a printer.

Fig. 5 is a flow chart of the details of a processing to be performed in Step S8 shown in Fig. 5.

Fig. 6 is a flow chart of the details of a processing to be performed in Step S8 shown in Fig. 5. And Fig. 10 is a flow chart of a processing to be performed by a language interpreter part 81 of the controller 11 in the printer 3.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 1 shows the overall structure of an embodiment of a print system according to the invention.

The present print system includes a host computer 1 and a page printer 3 connected to the host computer 1. In the host computer 1, an application program 5 notifies the start of a new print job to a plotting module (which is hereinafter referred to as "an application programming interface (API) module"), is provided within an operating system (OS) 7, and sends the call of the plotting function of the API to the API module 5. In response to this, the API module 5 sends a printer driver 9 the call of the plotting function of the printer driver 9 (which is hereinafter referred to as "a device driver interface (DDI) call").

The printer driver 9 converts the DDI call into a print command in an output format which can be recognized by the page printer 3. The output format includes two kinds of output formats. One of them is a high-level language which is generally referred to as a printer control language and, in the present embodiment, this corresponds to a Page Description Language (PDL). The other output format is an intermediate (IM) code which is described in an Intermediate Language (IML). This intermediate code is basically the same format as an intermediate code which is generated from PDL by a controller 11 provided in the page printer 3, but they are a little different in the details from each other. Hereinafter, in order to distinguish them from each other, the intermediate code to be generated by the printer driver 9 is referred to as a driver intermediate (DIM) code, whereas the intermediate code to be generated by the page printer 3 is referred to as a printer intermediate (PIM) code.

The DIM code implements the PIM code mainly in the following aspects. First, as to the character and image data, when a character band with a character and a character image data is used by a driver intermediate code, within the printer, the bit map data on the respective characters and bit images are placed in other memory areas than the PIM code, while pointing to the respective characters and bit images in the memory, and as to the description of the PIM code, for the character and image data, then, respectively, the DIM code and the PIM code are respectively described in the DIM code and the PIM code.

the identification numbers and the size specifications thereof and, next, the identification numbers of the characters and bit images, the coordinates thereof within the band, and the specifications of the actually used portions of the thus registered bit map data, and the like are described. After that, each time the same characters and bit images appear again within the same band, the identification numbers of the characters and bit images, the coordinates thereof within the band, the specifications of the actually used portions of the thus registered bit map data are described.

Also, generally, the PIM code within a printer supports a great variety of plotting functions. On the other hand, the DIM code must be matched to the function of the DDI that is supplied by the OS 7 and, therefore, if the function of the DDI is more limited than the function of the PIM code, for example, in the passes, graphics parameters, kinds of coordinate conversion function calls and the like, then the function of the DIM code is similarly more limited than the function of the PIM code in the above-mentioned respects.

The print command from the printer driver 9 is sent through the OS 7 to the printer 3. In the printer 3, the controller 11 interprets the print command and converts it into a PIM code. Here, when the controller 11 receives a print command expressed in the PDL, the controller 11 interprets the PDL command and converts it into a PIM code according to the same procedure as a conventional printer follows. On the other hand, on receipt of a DIM code, the controller 11 generates a PIM code by means of very simple conversion (that is, a conversion which merely cancels the above-mentioned differences). Therefore, the amount of processing of the controller 11 is very small when it receives the DIM code.

The controller 11 stores the thus generated PIM code into the intermediate code buffer 13. Also, in synchronization with the operation of the print engine 17, the controller 11 creates bit image data from the PIM code stored in the intermediate code buffer 13 and develops it to the image buffer 15. Here, under a specification that the print data is more advantageous than the PDL, the amount of the memory required for the image buffer 15 is reduced. The controller 11 also develops the DIM code into the image buffer 15 and generates bit image data from the DIM code, and then generates the image data.

The plot engine 17 reads out the bit map image from the image buffer 15 and prints it on a printing sheet. Therefore, the paper printer 3 may include a receive buffer with a capacity of provisionally storing a print command from the host computer 1.

Fig. 10 shows the internal structure of the printer

printer is a PDL format or a DIM code format. A mode to output the print command in the PDL format is referred to as a "printer page mode", whereas a mode to output the print command in the DIM code format is referred to as a "driver page mode". A method for deciding the page mode will be described in detail later.

In the printer page mode, the job data generation module 25 executes a plotting processing which corresponds to a DDI call delivered from the system interface 23 and, as a result of this, a print command chain relating to a print job (which is hereinafter referred to as job data) is generated in such format as shown in Fig. 3(A).

The job data shown in Fig. 3(A) starts with a job start declaration 41, and a language specify command 43 and a printer initialize command 45 follow sequentially after the job start declaration 41. After that, plotting commands 47 in pages follow, while a page eject command 49 is added to the end of each of the plotting commands 47 in the respective pages. A job end declaration 51 is placed after the last plotting command 47 in the last page, which ends the job data.

The first job start declaration 41, language specify command 43 and the last job end declaration 51 are expressed in a high-level language called a job language which is independent of a printer control language. The language specify command 43 specifies a printer control language to be used in the present job data and, in the present embodiment, a given PDL is specified as the language specify command 43.

Commands 45 to 49 following the language specify command 43 are respectively expressed in a given PDL specified by the language specify command 43. The printer initialize command 45 is used to initialize the environment or state of the printer. In the printer initialize command 45, there is also included the specification of a page mode and, here, a printer page mode is specified.

The plotting command 47 following the printer initialize command 45, as mentioned before, is described in the PDL in paper.

Now, referring again to Fig. 1, the output data is shown in Fig. 3(A), which is output from the job data generation module 25. A write request signal is added within the job data. After that, the job data is transmitted from the computer 1 to the printer 3.

On the other hand, in the case of the driver page mode, with respect to the plotting processing calls for the respective pages among the DDI calls delivered from the system interface 23, instead of the job data generation module 25, there is invoked an ILM driver 27, and the "ILM driver 27" generates a print command

calls not in the form of the PDL.

Fig. 3 (B) shows an example of the plotting command that is expressed in the IMM call and, in this example, a page is divided into one or more bands and the plotting command 55 of each band is expressed in the IMM call. To the heads of the plotting commands 55 of the respective bands, there are attached band number declarations 53 which show the start of the respective bands. The band number declarations 53 are respectively expressed in the PDL.

Therefore, from the IMM driver 27, there are output job data in a format obtained by replacing the portions of the job data of Fig. 3 (A) that correspond to the plotting commands 47 of the respective pages with such expressions as are shown in Fig. 3 (B). By the way, in the present job data, the driver page mode is specified with the printer initialize command 45.

The job data from the IMM driver 27 is delivered through shared memory 29 to a replay module 31. Here, delivery of the job data to the replay module 31 is basically executed through the shared memory 29 but, in the case of the job data having a large record size, the job data is arranged as a file and the name of the file is written into the shared memory 29.

The replay module 31 passes therethrough the portions of the job data that are expressed in the job language and PDL, that is, the job start declaration 41, language specify command 43, printer initialize command 45, band number declaration 53 and page eject command 49 respectively shown in Figs. 3 (A) and (B), as they are, and writes them into the spooler 35.

On the other hand, with respect to the plotting command 55 in the format of the IMM call shown in Fig. 3 (B), the replay module 31 calls the plotting function of the IMM module 33. The plotting function of the IMM module 33 converts the present plotting command 55 to a DIM code (that is, a driver intermediate code).

Fig. 3 (C) shows an example of a plotting command 61 included in each of the bands and converted to the DIM code and, to the head of the plotting command 61, there is attached a declaration 63 indicating that the plotting command 61 is an intermediate code that is called by the present intermediate code driver and the PDL code processing part 37.

Next, as shown in Fig. 4, the driver intermediate code data in the format that is entered by replacing the plotting command 47 of each page of the job data shown in Fig. 3 (A) with one shown in Fig. 3 (B) and further by replacing the plotting command 55 of each band shown in Fig. 3 (B) with one shown in Fig. 3 (C).

Fig. 4 shows the structure of the job data in the format that is entered by replacing the plotting command 47 of each page of the job data shown in Fig. 3 (A) with one shown in Fig. 3 (B) and further by replacing the plotting command 55 of each band shown in Fig. 3 (B) with one shown in Fig. 3 (C).

DIM code is included in the job data, the language interpret part 31 calls an intermediate code conversion part 55 through the GRM 53 and hands the DIM code over to the intermediate code conversion part 55.

The GRM 53 has a function to generate a PIM code (a printer intermediate code) in accordance with a plotting command expressed in the PDL. Also, the intermediate code conversion part 55 is a function which is added to the GRM 53 in order to convert the DIM code to the PIM code. Here, a processing for converting the DIM code to the PIM code is very simple when compared with a processing to be performed by the GRM 53, as was described before.

Therefore, for the printer page mode, in accordance with the result of the interpretation by the language interpret part 31, the GRM 53 generates a PIM code. On the other hand, for the driver page mode, the intermediate code conversion part 55 generates the PIM code from the DIM code included in the job data by means of simple conversion. Here, when it is more advantageous to convert the DIM code to bit map data from the beginning than to convert the DIM code to the PIM code, the DIM code may also be pre-developed to the bit map data.

In both modes, the generated PIM code is delivered from the GRM 53 to a PIM code register & develop part 57. The PIM code register & develop part 57 registers the PIM code in the intermediate code buffer 13 and, in synchronization with the operation of the print engine 17, reads out the PIM code from the intermediate code buffer 13 and develops a bit map image on the image buffer 15 in accordance with the read-out PIM code. Now, description will be given below in more detail of the operation of the above-mentioned structure.

Fig. 5 shows a flow chart of the overall flow of the processing to be performed by the printer driver 9.

At first, the printer driver 9 receives the DDI call from the API 8 (S1). If the initialize function of the driver 9 is invoked by the present DDI call (Y in S2), then not only is page mode decided (S3) but also banding (S4) is decided in the present initialize process and the driver engine 9 is evolved according to the result that is decided by the present process.

As shown in Fig. 5, in the operation of the printer driver 9, the evaluation points S11, S12, S13, S14, S15, S16, S17, S18, S19, S20, S21, S22, S23, S24, S25, S26, S27, S28, S29, S30, S31, S32, S33, S34, S35, S36, S37, S38, S39, S40, S41, S42, S43, S44, S45, S46, S47, S48, S49, S50, S51, S52, S53, S54, S55, S56, S57, S58, S59, S60, S61, S62, S63, S64, S65, S66, S67, S68, S69, S70, S71, S72, S73, S74, S75, S76, S77, S78, S79, S80, S81, S82, S83, S84, S85, S86, S87, S88, S89, S90, S91, S92, S93, S94, S95, S96, S97, S98, S99, S100, S101, S102, S103, S104, S105, S106, S107, S108, S109, S110, S111, S112, S113, S114, S115, S116, S117, S118, S119, S120, S121, S122, S123, S124, S125, S126, S127, S128, S129, S130, S131, S132, S133, S134, S135, S136, S137, S138, S139, S140, S141, S142, S143, S144, S145, S146, S147, S148, S149, S150, S151, S152, S153, S154, S155, S156, S157, S158, S159, S160, S161, S162, S163, S164, S165, S166, S167, S168, S169, S170, S171, S172, S173, S174, S175, S176, S177, S178, S179, S180, S181, S182, S183, S184, S185, S186, S187, S188, S189, S190, S191, S192, S193, S194, S195, S196, S197, S198, S199, S200, S201, S202, S203, S204, S205, S206, S207, S208, S209, S210, S211, S212, S213, S214, S215, S216, S217, S218, S219, S220, S221, S222, S223, S224, S225, S226, S227, S228, S229, S230, S231, S232, S233, S234, S235, S236, S237, S238, S239, S240, S241, S242, S243, S244, S245, S246, S247, S248, S249, S250, S251, S252, S253, S254, S255, S256, S257, S258, S259, S260, S261, S262, S263, S264, S265, S266, S267, S268, S269, S270, S271, S272, S273, S274, S275, S276, S277, S278, S279, S280, S281, S282, S283, S284, S285, S286, S287, S288, S289, S290, S291, S292, S293, S294, S295, S296, S297, S298, S299, S300, S301, S302, S303, S304, S305, S306, S307, S308, S309, S310, S311, S312, S313, S314, S315, S316, S317, S318, S319, S320, S321, S322, S323, S324, S325, S326, S327, S328, S329, S330, S331, S332, S333, S334, S335, S336, S337, S338, S339, S340, S341, S342, S343, S344, S345, S346, S347, S348, S349, S350, S351, S352, S353, S354, S355, S356, S357, S358, S359, S360, S361, S362, S363, S364, S365, S366, S367, S368, S369, S370, S371, S372, S373, S374, S375, S376, S377, S378, S379, S380, S381, S382, S383, S384, S385, S386, S387, S388, S389, S390, S391, S392, S393, S394, S395, S396, S397, S398, S399, S400, S401, S402, S403, S404, S405, S406, S407, S408, S409, S410, S411, S412, S413, S414, S415, S416, S417, S418, S419, S420, S421, S422, S423, S424, S425, S426, S427, S428, S429, S430, S431, S432, S433, S434, S435, S436, S437, S438, S439, S440, S441, S442, S443, S444, S445, S446, S447, S448, S449, S450, S451, S452, S453, S454, S455, S456, S457, S458, S459, S460, S461, S462, S463, S464, S465, S466, S467, S468, S469, S470, S471, S472, S473, S474, S475, S476, S477, S478, S479, S480, S481, S482, S483, S484, S485, S486, S487, S488, S489, S490, S491, S492, S493, S494, S495, S496, S497, S498, S499, S500, S501, S502, S503, S504, S505, S506, S507, S508, S509, S510, S511, S512, S513, S514, S515, S516, S517, S518, S519, S520, S521, S522, S523, S524, S525, S526, S527, S528, S529, S530, S531, S532, S533, S534, S535, S536, S537, S538, S539, S540, S541, S542, S543, S544, S545, S546, S547, S548, S549, S550, S551, S552, S553, S554, S555, S556, S557, S558, S559, S560, S561, S562, S563, S564, S565, S566, S567, S568, S569, S570, S571, S572, S573, S574, S575, S576, S577, S578, S579, S580, S581, S582, S583, S584, S585, S586, S587, S588, S589, S590, S591, S592, S593, S594, S595, S596, S597, S598, S599, S600, S601, S602, S603, S604, S605, S606, S607, S608, S609, S610, S611, S612, S613, S614, S615, S616, S617, S618, S619, S620, S621, S622, S623, S624, S625, S626, S627, S628, S629, S630, S631, S632, S633, S634, S635, S636, S637, S638, S639, S640, S641, S642, S643, S644, S645, S646, S647, S648, S649, S650, S651, S652, S653, S654, S655, S656, S657, S658, S659, S660, S661, S662, S663, S664, S665, S666, S667, S668, S669, S670, S671, S672, S673, S674, S675, S676, S677, S678, S679, S680, S681, S682, S683, S684, S685, S686, S687, S688, S689, S690, S691, S692, S693, S694, S695, S696, S697, S698, S699, S700, S701, S702, S703, S704, S705, S706, S707, S708, S709, S710, S711, S712, S713, S714, S715, S716, S717, S718, S719, S720, S721, S722, S723, S724, S725, S726, S727, S728, S729, S730, S731, S732, S733, S734, S735, S736, S737, S738, S739, S740, S741, S742, S743, S744, S745, S746, S747, S748, S749, S750, S751, S752, S753, S754, S755, S756, S757, S758, S759, S760, S761, S762, S763, S764, S765, S766, S767, S768, S769, S770, S771, S772, S773, S774, S775, S776, S777, S778, S779, S780, S781, S782, S783, S784, S785, S786, S787, S788, S789, S790, S791, S792, S793, S794, S795, S796, S797, S798, S799, S800, S801, S802, S803, S804, S805, S806, S807, S808, S809, S810, S811, S812, S813, S814, S815, S816, S817, S818, S819, S820, S821, S822, S823, S824, S825, S826, S827, S828, S829, S830, S831, S832, S833, S834, S835, S836, S837, S838, S839, S840, S841, S842, S843, S844, S845, S846, S847, S848, S849, S850, S851, S852, S853, S854, S855, S856, S857, S858, S859, S860, S861, S862, S863, S864, S865, S866, S867, S868, S869, S870, S871, S872, S873, S874, S875, S876, S877, S878, S879, S880, S881, S882, S883, S884, S885, S886, S887, S888, S889, S890, S891, S892, S893, S894, S895, S896, S897, S898, S899, S900, S901, S902, S903, S904, S905, S906, S907, S908, S909, S910, S911, S912, S913, S914, S915, S916, S917, S918, S919, S920, S921, S922, S923, S924, S925, S926, S927, S928, S929, S930, S931, S932, S933, S934, S935, S936, S937, S938, S939, S940, S941, S942, S943, S944, S945, S946, S947, S948, S949, S950, S951, S952, S953, S954, S955, S956, S957, S958, S959, S960, S961, S962, S963, S964, S965, S966, S967, S968, S969, S970, S971, S972, S973, S974, S975, S976, S977, S978, S979, S980, S981, S982, S983, S984, S985, S986, S987, S988, S989, S990, S991, S992, S993, S994, S995, S996, S997, S998, S999, S1000, S1001, S1002, S1003, S1004, S1005, S1006, S1007, S1008, S1009, S1010, S1011, S1012, S1013, S1014, S1015, S1016, S1017, S1018, S1019, S1020, S1021, S1022, S1023, S1024, S1025, S1026, S1027, S1028, S1029, S1030, S1031, S1032, S1033, S1034, S1035, S1036, S1037, S1038, S1039, S1040, S1041, S1042, S1043, S1044, S1045, S1046, S1047, S1048, S1049, S1050, S1051, S1052, S1053, S1054, S1055, S1056, S1057, S1058, S1059, S1060, S1061, S1062, S1063, S1064, S1065, S1066, S1067, S1068, S1069, S1070, S1071, S1072, S1073, S1074, S1075, S1076, S1077, S1078, S1079, S1080, S1081, S1082, S1083, S1084, S1085, S1086, S1087, S1088, S1089, S1090, S1091, S1092, S1093, S1094, S1095, S1096, S1097, S1098, S1099, S1100, S1101, S1102, S1103, S1104, S1105, S1106, S1107, S1108, S1109, S1110, S1111, S1112, S1113, S1114, S1115, S1116, S1117, S1118, S1119, S1120, S1121, S1122, S1123, S1124, S1125, S1126, S1127, S1128, S1129, S1130, S1131, S1132, S1133, S1134, S1135, S1136, S1137, S1138, S1139, S1140, S1141, S1142, S1143, S1144, S1145, S1146, S1147, S1148, S1149, S1150, S1151, S1152, S1153, S1154, S1155, S1156, S1157, S1158, S1159, S1160, S1161, S1162, S1163, S1164, S1165, S1166, S1167, S1168, S1169, S1170, S1171, S1172, S1173, S1174, S1175, S1176, S1177, S1178, S1179, S1180, S1181, S1182, S1183, S1184, S1185, S1186, S1187, S1188, S1189, S1190, S1191, S1192, S1193, S1194, S1195, S1196, S1197, S1198, S1199, S1200, S1201, S1202, S1203, S1204, S1205, S1206, S1207, S1208, S1209, S1210, S1211, S1212, S1213, S1214, S1215, S1216, S1217, S1218, S1219, S1220, S1221, S1222, S1223, S1224, S1225, S1226, S1227, S1228, S1229, S1230, S1231, S1232, S1233, S1234, S1235, S1236, S1237, S1238, S1239, S1240, S1241, S1242, S1243, S1244, S1245, S1246, S1247, S1248, S1249, S1250, S1251, S1252, S1253, S1254, S1255, S1256, S1257, S1258, S1259, S1260, S1261, S1262, S1263, S1264, S1265, S1266, S1267, S1268, S1269, S1270, S1271, S1272, S1273, S1274, S1275, S1276, S1277, S1278, S1279, S1280, S1281, S1282, S1283, S1284, S1285, S1286, S1287, S1288, S1289, S1290, S1291, S1292, S1293, S1294, S1295, S1296, S1297, S1298, S1299, S1300, S1301, S1302, S1303, S1304, S1305, S1306, S1307, S1308, S1309, S1310, S1311, S1312, S1313, S1314, S1315, S1316, S1317, S1318, S1319, S1320, S1321, S1322, S1323, S1324, S1325, S1326, S1327, S1328, S1329, S1330, S1331, S1332, S1333, S1334, S1335, S1336, S1337, S1338, S1339, S1340, S1341, S1342, S1343, S1344, S1345, S1346, S1347, S1348, S1349, S1350, S1351, S1352, S1353, S1354, S1355, S1356, S1357, S1358, S1359, S1360, S1361, S1362, S1363, S1364, S1365, S1366, S1367, S1368, S1369, S1370, S1371, S1372, S1373, S1374, S1375, S1376, S1377, S1378, S1379, S1380, S1381, S1382, S1383, S1384, S1385, S1386, S1387, S1388, S1389, S1390, S1391, S1392, S1393, S1394, S1395, S1396, S1397, S1398, S1399, S1400, S1401, S1402, S1403, S1404, S1405, S1406, S1407, S1408, S1409, S1410, S1411, S1412, S1413, S1414, S1415, S1416, S1417, S1418, S1419, S1420, S1421, S1422, S1423, S1424, S1425, S1426, S1427, S1428, S1429, S1430, S1431, S1432, S1433, S1434, S1435, S1436, S1437, S1438, S1439, S1440, S1441, S1442, S1443, S1444, S1445, S1446, S1447, S1448, S1449, S1450, S1451, S1452, S1453, S1454, S1455, S1456, S1457, S1458, S1459, S1460, S1461, S1462, S1463, S1464, S1465, S1466, S1467, S1468, S1469, S1470, S1471, S1472, S1473, S1474, S1475, S1476, S1477, S1478, S1479, S1480, S1481, S1482, S1483, S1484, S1485, S1486, S1487, S1488, S1489, S1490, S1491, S1492, S1493, S1494, S1495, S1496, S1497, S1498, S1499, S1500, S1501, S1502, S1503, S1504, S1505, S1506, S1507, S1508, S1509, S1510, S1511, S1512, S1513, S1514, S1515, S1516, S1517, S1518, S1519, S1520, S1521, S1522, S1523, S1524, S1525, S1526, S1527, S1528, S1529, S1530, S1531, S1532, S1533, S1534, S1535, S1536, S1537, S1538, S1539, S1540, S1541, S1542, S1543, S1544, S1545, S1546, S1547, S1548, S1549, S1550, S1551, S1552, S1553, S1554, S1555, S1556, S1557, S1558, S1559, S1560, S1561, S1562, S1563, S1564, S1565, S1566, S1567, S1568, S1569, S1570, S1571, S1572, S1573, S1574, S1575, S1576, S1577, S1578, S1579, S1580, S1581, S1582, S1583, S1584, S1585, S1586, S1587, S1588, S1589, S1590, S1591, S1592, S1593, S1594, S1595, S1596, S1597, S1598, S1599, S1600, S1601, S1602, S1603, S1604, S1605, S1606, S1607, S1608, S1609, S1610, S1611, S1612, S1613, S1614, S1615, S1616, S1617, S1618, S1619, S1620, S1621, S1622, S1623, S1624, S1625, S1626, S1627, S1628, S1629, S1630, S1631, S1632, S1633, S1634, S1635, S1636, S1637, S1638, S1639, S1640, S1641, S1642, S1643, S1644, S1645, S1646, S1647, S1648, S1649, S1650, S1651, S1652, S1653, S1654, S1655, S1656, S1657, S1658, S1659, S1660, S1661, S1662, S1663, S1664, S1665, S1666, S1667, S1668, S1669, S1670, S1671, S1672, S1673, S1674, S1675, S1676, S1677, S1678, S1679, S1680, S1681, S1682, S1683, S1684, S1685, S1686, S1687, S1688, S1689, S1690, S1691, S1692, S1693, S1694, S1695, S1696, S1697, S1698, S1699, S1700, S1701, S1702, S1703, S1704, S1705, S1706, S1707, S1708, S1709, S1710, S1711, S1712, S1713, S1714, S1715, S1716, S1717, S1718, S1719, S1720, S1721, S1722, S1723, S1724, S1725, S1726, S1727, S1728, S1729, S1730, S1731, S1732, S1733, S1734, S1735, S1736, S1737, S1738, S1739, S1740, S1741, S1742, S1743, S1744, S1745, S1746, S1747, S1748, S1749, S1750, S1751, S1752, S1753, S1754, S1755, S1756, S1757, S1758, S1759, S1760, S1761, S1762, S1763, S1764, S1765, S1766, S1767, S1768, S1769, S1770, S1771, S1772, S1773, S1774, S1775, S1776, S1777, S1778, S1779, S1780, S1781, S1782, S1783, S1784, S1785, S1786, S1787, S1788, S1789, S1790, S1791, S1792, S1793, S1794, S1795, S1796, S1797, S1798, S1799, S1800, S1801, S1802, S1803, S1804, S1805, S1806, S1807, S1808, S1809, S1810, S1811, S1812, S1813, S1814, S1815, S1816, S1817, S1818, S1819, S1820, S1821, S1822, S1823, S1824, S1825, S1826, S1827, S1828, S1829, S1830, S1831, S1832, S1833, S1834, S1835, S1836, S1837, S1838, S1839, S1840, S1841, S1842, S1843, S1844, S1845, S1846, S1847, S1848, S1849, S1850, S1851, S1852, S1853, S1854, S1855, S1856, S1857, S1858, S1859, S1860, S1861, S1862, S1863, S1864, S1865, S1866, S1867, S1868, S1869, S1870, S1871, S1872, S1873, S1874, S1875, S1876, S1877, S1878, S1879, S1880, S1881, S1882, S1883, S1884, S1885, S1886, S1887, S1888, S1889, S1890, S1891, S1892, S1893, S1894, S1895, S1896, S1897, S1898, S1899, S1900, S1901, S1902, S1903, S1904, S1905, S1906, S1907, S1908, S1909, S1910, S1911, S1912, S1913, S1914, S1915, S1916, S1917, S1918, S1919, S1920, S1921, S1922, S1923, S1924, S1925, S1926, S1927, S1928, S1929, S1930, S1931, S1932, S1933, S1934, S1935, S1936, S1937, S1938, S1939, S1940, S1941, S1942

5 from each other. That is, whether the application 5 is an application of a type that is mainly used to handle characters (such as a text editor, a word processor, or the like) or a type that is mainly used to handle graphics forms (such as CAD, draw-system graphics, or the like) or a type that is mainly used to handle images (such as photo-retouch, paint-system graphics, or the like).

As can be seen from Fig. 7, the parameters can be evaluated in the following manner. That is, when the quantity of data to be processed is large or the power of a printer is low, the evaluation point of the driver page mode is high. On the other hand, when the quantity of data to be processed is small or the capability of a host computer is low, the evaluation point of the printer page mode is high. The evaluation points of these parameters are summed up for each of the two modes and the sum values of the evaluation points of the two modes are compared with each other. The mode that is found higher in the sum value is selected.

By the way, when the present print job is to plot characters using fonts prepared within the printer, the following technique can also be employed.

That is, as shown in Fig. 3 (D), in this technique, it is arranged that certain plotting commands 65 and 69 in one band are expressed in the IMM call, the other command 67 is expressed in the PDL and, after that, as shown in Fig. 3 (E), the IMM calls 65 and 69 are converted to a DIM code 75. Under this arrangement, when there is included a command to plot characters using the printer fonts, the command 67 is expressed in the PDL as conventionally and thus the command 67 is allowed to exist together with the plotting commands 65 and 69 expressed in the IMM call. For this reason, although the portion of the command to plot characters using the printer fonts can be processed only at the same speed as the conventional processing speed, the other portions thereof are allowed to generate intermediate codes on the printer driver side, with the result that the present print job as a whole can be processed at high speed.

As a specific example, when the command 67 is a command to plot characters using printer fonts, the command 67 is converted to a DIM code 75 and the DIM code 75 is expressed in the IMM call. That is, the plotting commands 65 and 69 are converted to DIM codes 75 and the command 67 is converted to a DIM code 75 and the DIM code 75 is expressed in the IMM call, so that an intermediate code can be generated on the printer driver side.

Now, referring again to Fig. 6, in the driver page mode, the job data generation module 25 generates a DIM code 75 and the DIM code 75 is expressed in the IMM call. After that, the DIM code 75 is expressed

is processed as a band, is decided (S16). Here, the larger the size of the P byte is, the less frequently the plotting element is divided, which reduces the number of times of replay to thereby reduce the driver processing time, resulting in improved performance of the overall processing.

On the other hand, when the P byte cannot be secured, P is divided by 2 and n is doubled (S17) and, after that, it is checked whether or not the P byte can be secured (S18). If the P byte cannot be secured, then P is divided by 2 and n is doubled again (S17). This operation is executed repeatedly until the P byte can be secured. If the P byte can be secured, then the memory area of the P byte is secured as a buffer for the DIM code and there is decided such a banding processing as can divide a page by the band number that is indicated by the current n (S19).

By the way, in the case of the printer page mode, since the plotting contents are described in the PDL in pages, an unbanding processing is inevitably decided.

Referring again to Fig. 5, after the above-mentioned driver initialization procedure is ended, depending on whether the mode is the printer page mode or driver page mode (S5) as described before, the main operation of the plotting processing is assigned to the job generation module 25 or IMM driver 27. That is, if the mode is the printer page mode, then the plotting function of the job generation module 25 is called by the plotting DDI call, plotting commands in the PDL are thereby generated, and the thus generated PDL commands are respectively written into the spooler 35 in pages (S6).

On the other hand, for the driver page mode, the function of the IMM driver 27 is invoked by the plotting DDI call, a function call for the IMM module 33 is thereby generated, and the thus generated function call is then written into the shared memory 29 (S7). Also, asynchronously with the writing of the function call into the shared memory 29, in response to an IMM function call within the shared memory 29, the replay module 31 calls the IMM module 33, generates a DIM code, and writes the thus generated DIM code into the spooler 35 (S8). The above-mentioned processing is performed repeatedly until all DIM codes of the present print job are generated (S9).

Fig. 8 shows the details of the above-mentioned processing of the DIM code generated in step S8. When a DIM code is generated, the job data generation module 25 and IMM driver 27 shown in Fig. 2

At first, a DDI call for retrieval of the DIM code is received (S21). In response to this, there are generated DIM codes from the DIM code of the DIM code of the IMM module 33 and the DIM code of the DIM code

mand 65 in the form of an IMM call and band number declarations 68 and 67 expressed in the PDL which are respectively shown in Fig. 3 (B) and they are then written into the shared memory 29 (S26). Finally a DD call for ending the job is received and in response to this there is generated the job end declaration 61 shown in Fig. 3 (A) (S27) and the thus generated job end declaration 61 is written into the shared memory 29 (S26).

Fig. 4 shows the details of the processing to be performed in Step S8 shown in Fig. 5. This processing is executed by the replay module 31 and IMM module 33 shown in Fig. 2.

First, the replay module 31 reads out job data from the shared memory 29 (S31) and checks whether or not a command included in the thus read-out job data is a command described in a job language or a command described in the PDL (S32). Then, if it is found that the command in the job data is described in the job language or PDL, then the command as it is is output to the spooler 35 (Y in S32). On the other hand, for an IMM call in the job data, there is invoked a plotting function which is stored in the IMM module 33 and corresponds to the IMM call (S33) and a plotting processing is executed using the parameters of the present IMM call (S34). In the plotting processing, at first, bit map data on characters and bit images are developed onto a previously secured page memory (or band memory) (S34) and, in bands, there are generated such plotting commands 61 in the form of DIM codes as shown in Fig. 3 (C) (S35). In this operation, according to the case as described before, the respective bands may be pre-developed to the bit map images not in the form of DIM codes. After that, the thus generated DIM code plotting commands 61 are output to the spooler 35 (S36). The above-mentioned processing is performed repeatedly until the last portion of the job data is finished (S37).

Fig. 10 shows the details of the processing to be performed by the language interpreter part 51 of the controller 11 provided within the printer, which is already shown in Fig. 4.

At first, the processing in the driver page mode is done. In the driver page mode, the plotting commands of all pages are expressed in the intermediate code form. However, the invention is not always limited to this but, for example, some pages may be expressed in the intermediate code, whereas the other pages may be expressed in the PDL. That is, the intermediate code conversion processing may be controlled in pages. Or, the intermediate code conversion processing may be controlled in applications.

On the other hand, if the driver page mode is specified, then the plotting command in the form of a DIM code as it is is output to the GRM 83 (S32). In response to this, as described before, the GRM 83 invokes the intermediate code convert part 85 to thereby convert the DIM code to the PIM code. This conversion processing is so simple that it can be executed at a high speed.

As described above, in the present embodiment, for each print job, the printer page mode or driver page mode is selected and, for the driver page mode, the plotting command is converted to the intermediate code by the printer driver before it is supplied to the printer. This relieves the processing burden of the printer to thereby be able to enhance the processing speed of the printer. Therefore, by selecting the driver page mode properly according to the state of the entire system, the processing speed of the whole system can be improved.

By the way, in the above-mentioned embodiment in the driver page mode, the plotting commands of all pages are expressed in the intermediate code form. However, the invention is not always limited to this but, for example, some pages may be expressed in the intermediate code, whereas the other pages may be expressed in the PDL. That is, the intermediate code conversion processing may be controlled in pages. Or, the intermediate code conversion processing may be controlled in applications.

Also, the above conversion processing can be controlled in bands or in commands. In particular, when the processing is controlled in bands, for example, the plotting commands of certain bands are converted to the IMM codes as shown in Fig. 3 (B) and, for the plotting commands of the other bands, there is used the PDL. In this case, when the plotting commands of the bands 65 and 66 in a band are expressed in the IMM call and the other band 67 is expressed in the PDL and then, as shown in Fig. 3 (E), the IMM call 68 and graphics 69 are converted to the DIM callings.

As mentioned above, when in the driver page mode, the plotting commands are expressed in the DIM

S51), then a clipping area corresponding to the range of a physical band to be processed is firstly set (S54), the bit map data on the characters is then generated (S56), and a character plotting instruction is given to the GRM 83 (S57). Also, if the command to plot graphics is received, similarly, a clipping area corresponding to the range of a physical band to be processed is firstly set (S55), the plotting control point of the graphics is then set (S58), and after that, a graphics plotting instruction is given to the GRM 83 (S59). Further, if the command to plot bit images is received, similarly, a clipping area corresponding to the range of a physical band to be processed is firstly set (S63), the bit map data on the bit images is created (S60) and after that, an image plotting instruction is given to the GRM 83 (S61). On the other hand, if the command expressed in the intermediate code is received, then the command, as it is, is delivered to the GRM 83 (S62).

It should be noted here that the invention is not limited to the above-mentioned embodiment but other embodiments which include changes, improvements, modifications and the like with respect to the above-mentioned embodiment, are also possible.

Claims

1. A print system comprising a host computer and a printer connected to the host computer, wherein said host computer includes a printer driver used to generate print job data including plotting commands to be given to said printer, said printer driver includes intermediate level job data generation means used to generate intermediate level job data including plotting commands at least part of which is expressed in a first intermediate code format, and said printer includes intermediate code convert means used to receive said intermediate level print job data and convert said plotting commands to a second intermediate code format, and third convert means used to convert said second intermediate code format into bit map image data for printing.
2. A print system as set forth in Claim 1, wherein said intermediate level print job data includes plotting information, according to which, plotting commands are expressed in said first intermediate code format, and said intermediate code convert means distinguishes said plotting commands in said first intermediate code format from other information, and with said plotting commands, generates, in said printer, bit map image data for printing.
3. A print system as set forth in Claim 1, wherein said intermediate level job data generation means includes pre-develop means used to pre-develop bit map image data from said plotting commands expressed in said first intermediate code format.
4. A print system as set forth in Claim 3, wherein said mode select means automatically selects one of said intermediate level job data generation means and said high-level job data generation means for each print job, each page, each band, each plotting command, and each application program.
5. A print system as set forth in Claim 3, wherein said mode select means always selects said high-level job data generation means when a print job uses fonts provided internally in said printer.
6. A print system as set forth in Claim 1, wherein said first intermediate code format includes bit map image data on characters or images to be plotted, whereas said second intermediate code format does not include bit map image data on characters or images to be plotted.
7. A print system as set forth in Claim 1, wherein said intermediate level job data generation means includes pre-develop means used to pre-develop bit map image data from said plotting commands expressed in said first intermediate code format.
8. A printing method using a host computer and a printer connected to the host computer, said method comprising the following steps:
 - generating, in said host computer, intermediate level print job data including plotting commands which are to be given to said printer, and at least part of which is expressed in a first intermediate code format, and then transmitting said generated print job data to said printer;
 - receiving, in said printer, said intermediate level print job data and converting said plotting commands to a second intermediate code, and
 - converting, in said printer, said second intermediate code to bit map image data for printing.
9. A printer driver for use in a host computer, which generates intermediate level print job data including plotting commands which are to be given to said printer, and at least part of which is expressed in a first intermediate code format, and then transmitting said generated print job data to said printer.

means for generating high-level job data including plotting commands all of which are expressed in a high-level printer control language, and mode select means for selecting one of said intermediate level job data generation means and said high-level job data generation means.

11. A program medium carrying a printer driver computer program for generating print job data including plotting commands to be given to a printer, characterized in that said program medium carries a group of instructions for generating intermediate level job data including plotting commands at least part of which is expressed in a first intermediate code format in such a manner that said group of instructions can be read and understood by a computer.
12. A printer comprising:
 - means for receiving print job data including plotting commands;
 - intermediate code convert means for when said plotting commands of said received print job data are expressed in first intermediate code format converting said first intermediate code to a second intermediate code; and
 - third means for converting said second intermediate code to bit map image data for printing.
13. A printer as set forth in Claim 12 further including graphics means for when said plotting commands of said received print job data are expressed in a high-level printer control language converting said plotting commands in said high-level printer control language to said second intermediate code.

FIG. 1

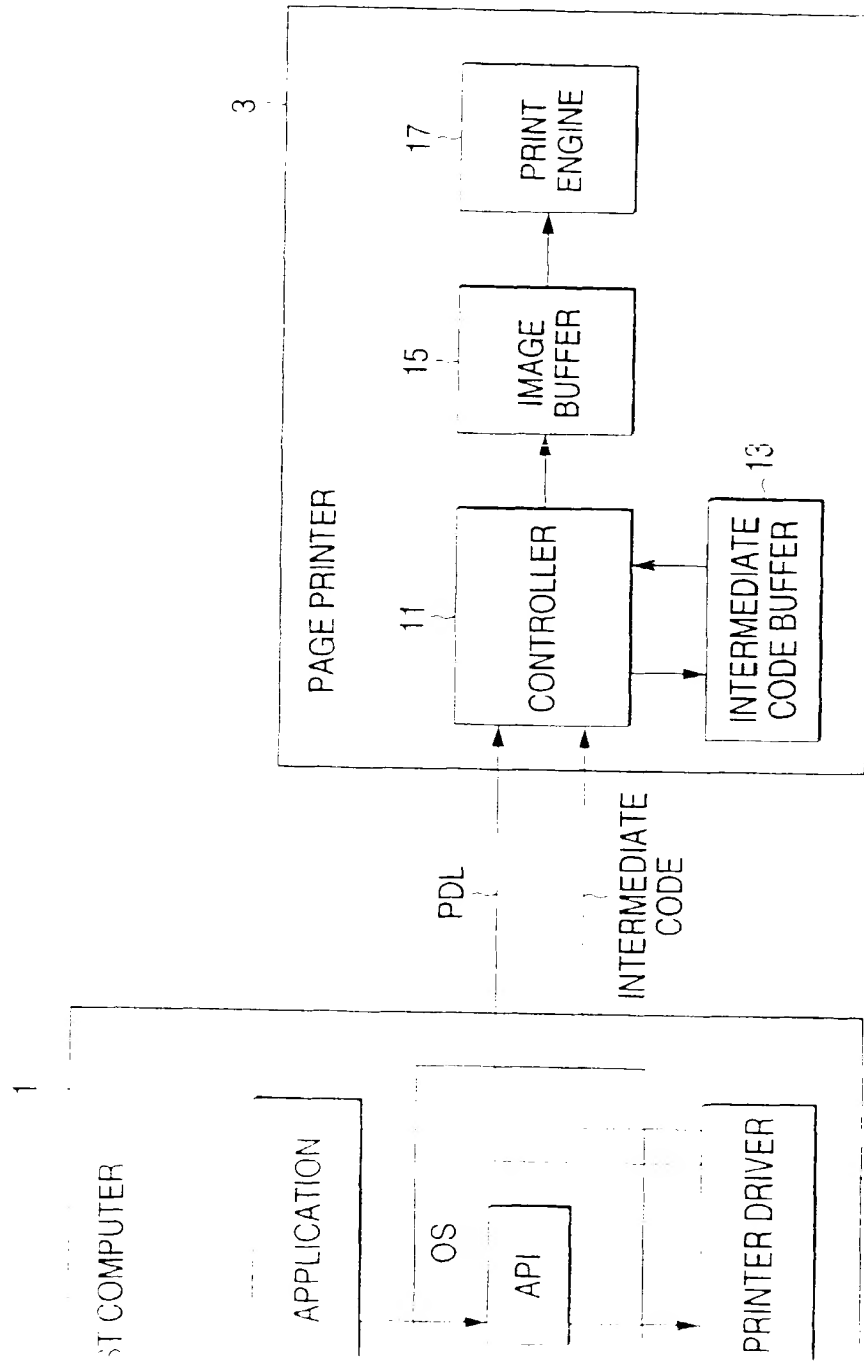


FIG. 2

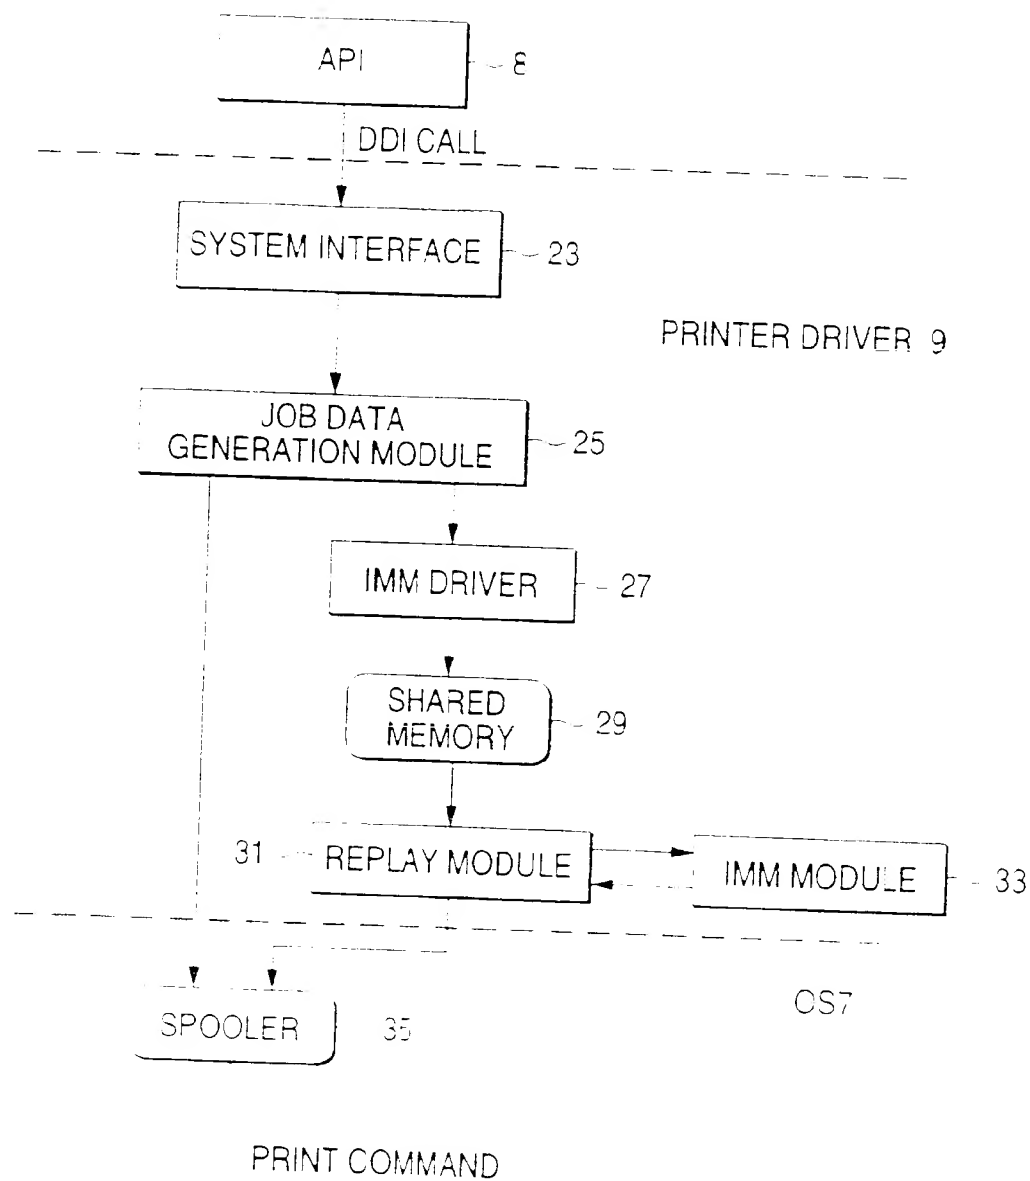


FIG. 3 (A)

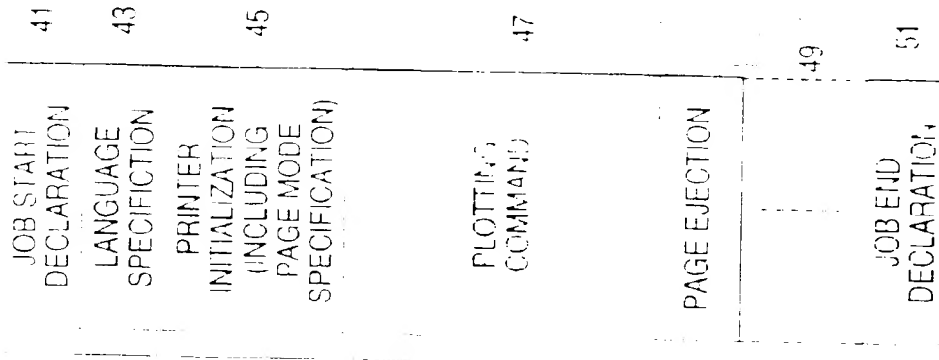


FIG. 3 (B)

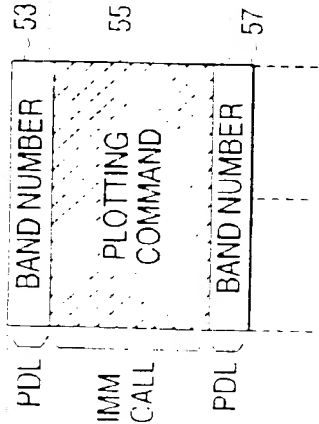


FIG. 3 (C)

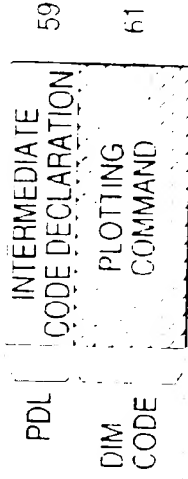


FIG. 3 (D)

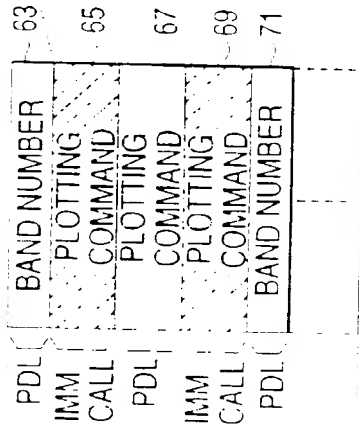


FIG. 3 (E)

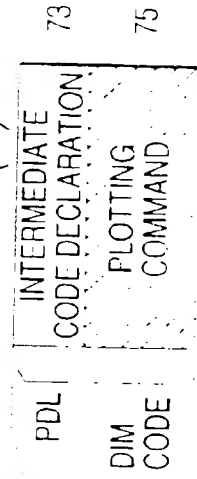


FIG. 4

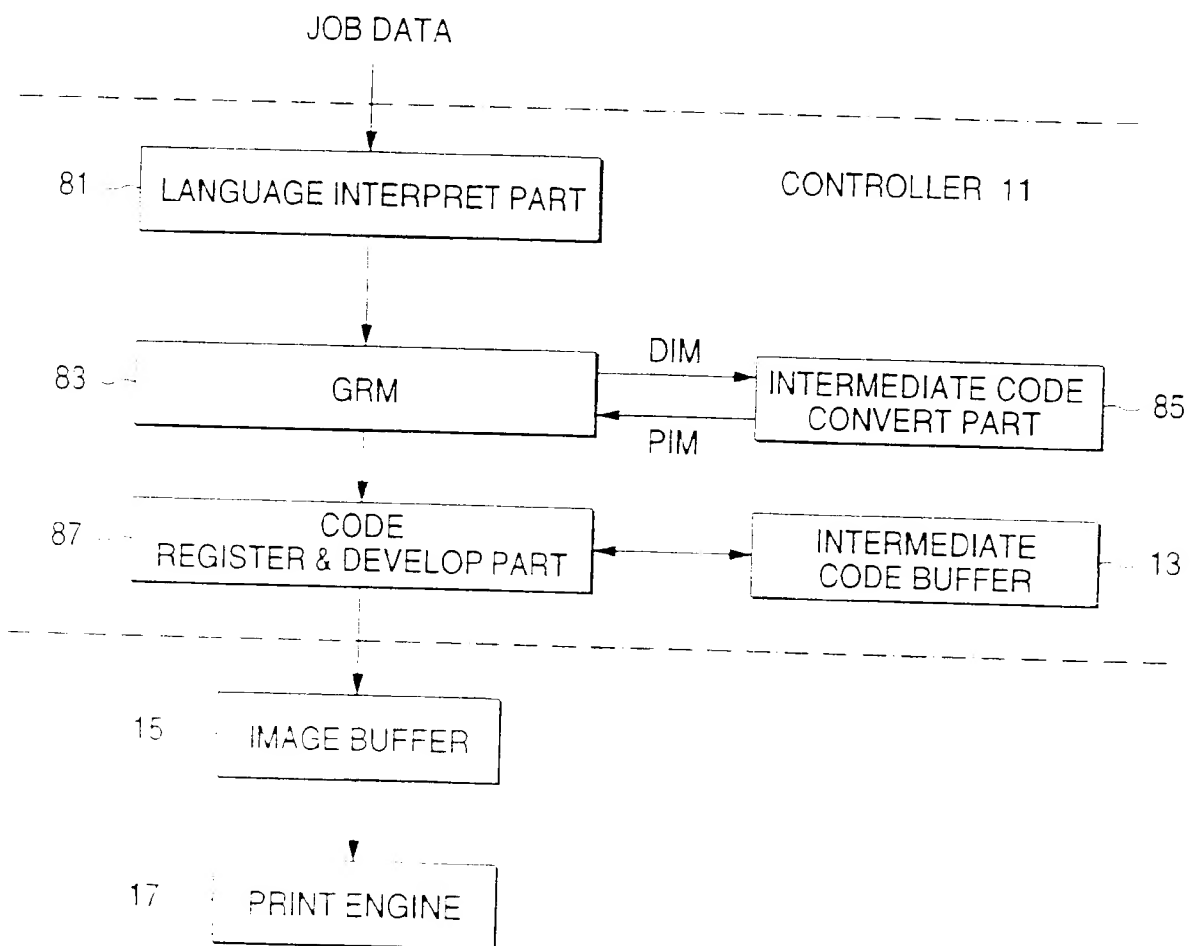


FIG. 5

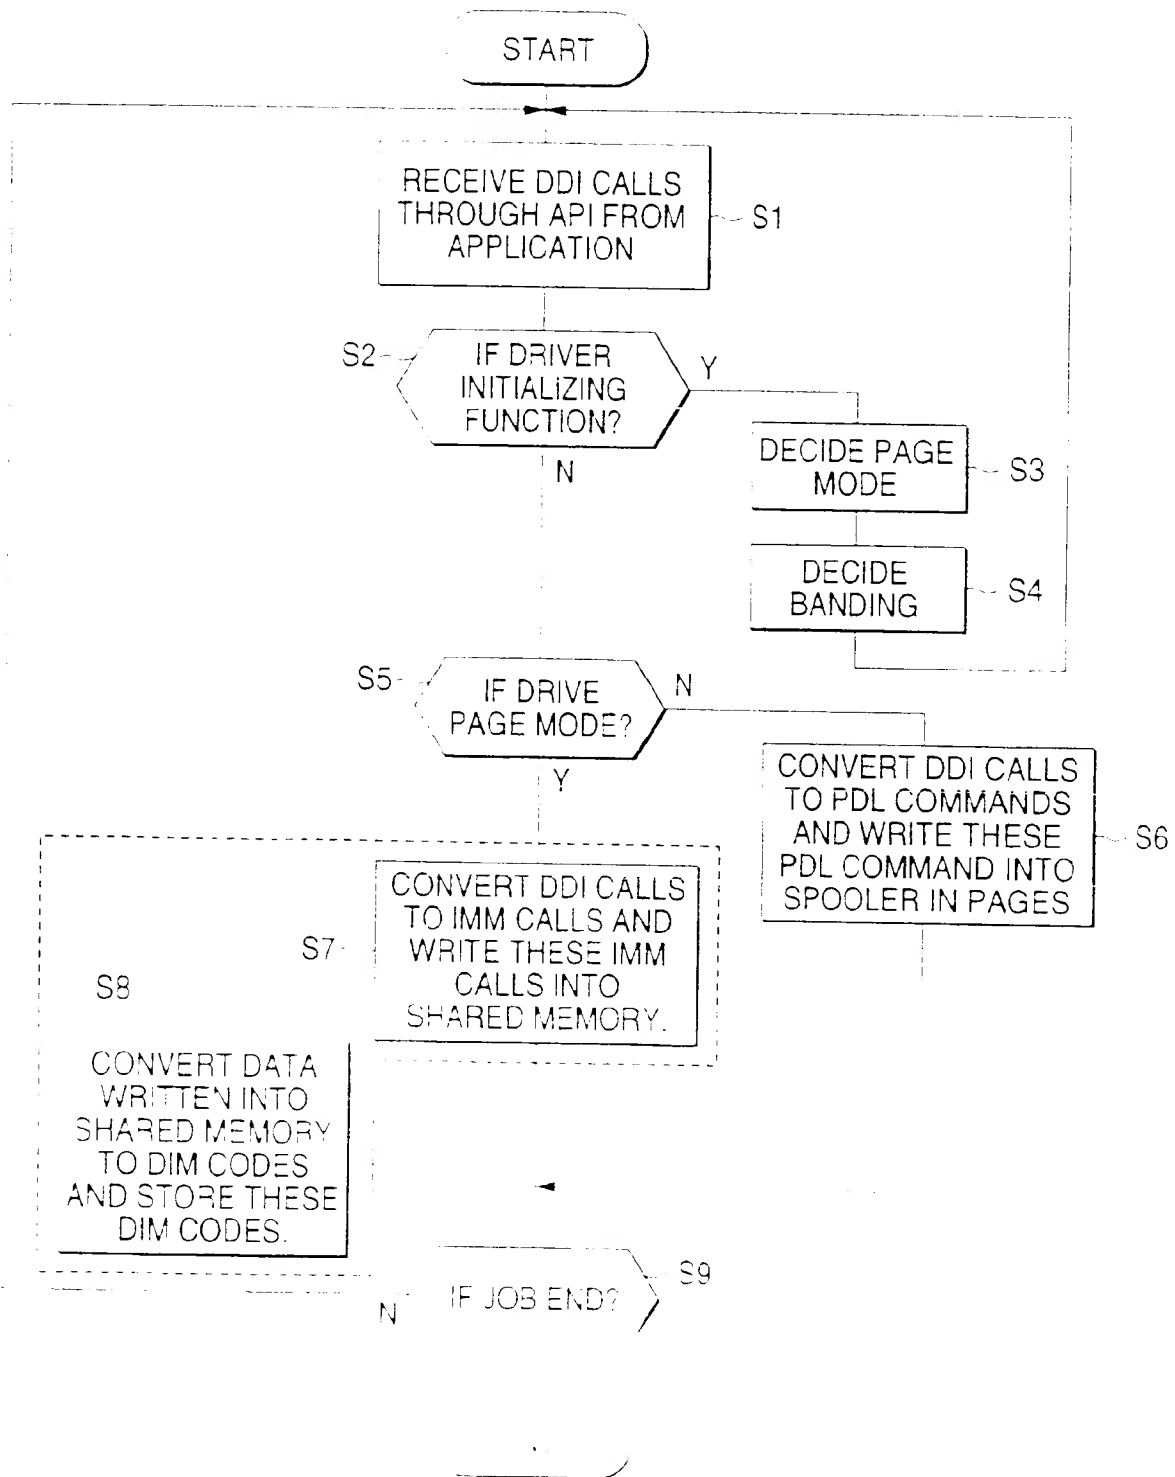


FIG. 6

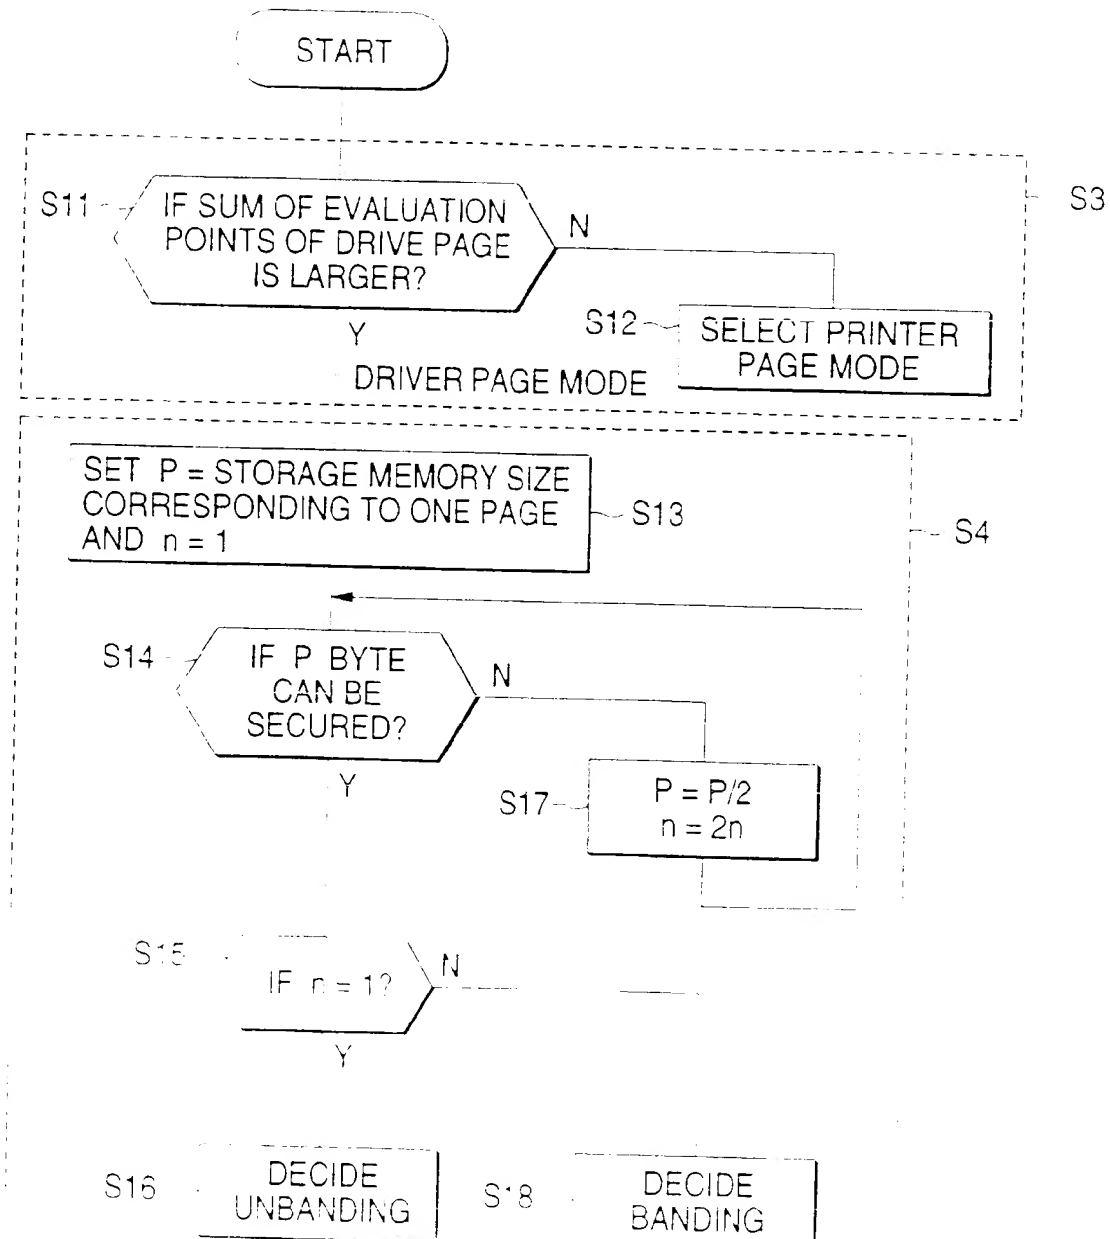


FIG. 7

PARAMETER		PRINTER PAGE	DRIVER PAGE
APPLICATION TYPE	TEXT	7	3
	GRAPHICS	5	5
	BIT IMAGE	3	7
	UNKNOWN	5	5
PRINTER MEMORY	LARGE	5	5
	SMALL	2	8
PRINTER CPU	FAST	8	2
	SLOW	2	8
HOST MEMORY	LARGE	5	5
	SMALL	7	3
HOST CPU	FAST	5	5
	SLOW	7	3
CONNECTION	LOCAL	5	5
	NETWORK	6	4

FIG. 8

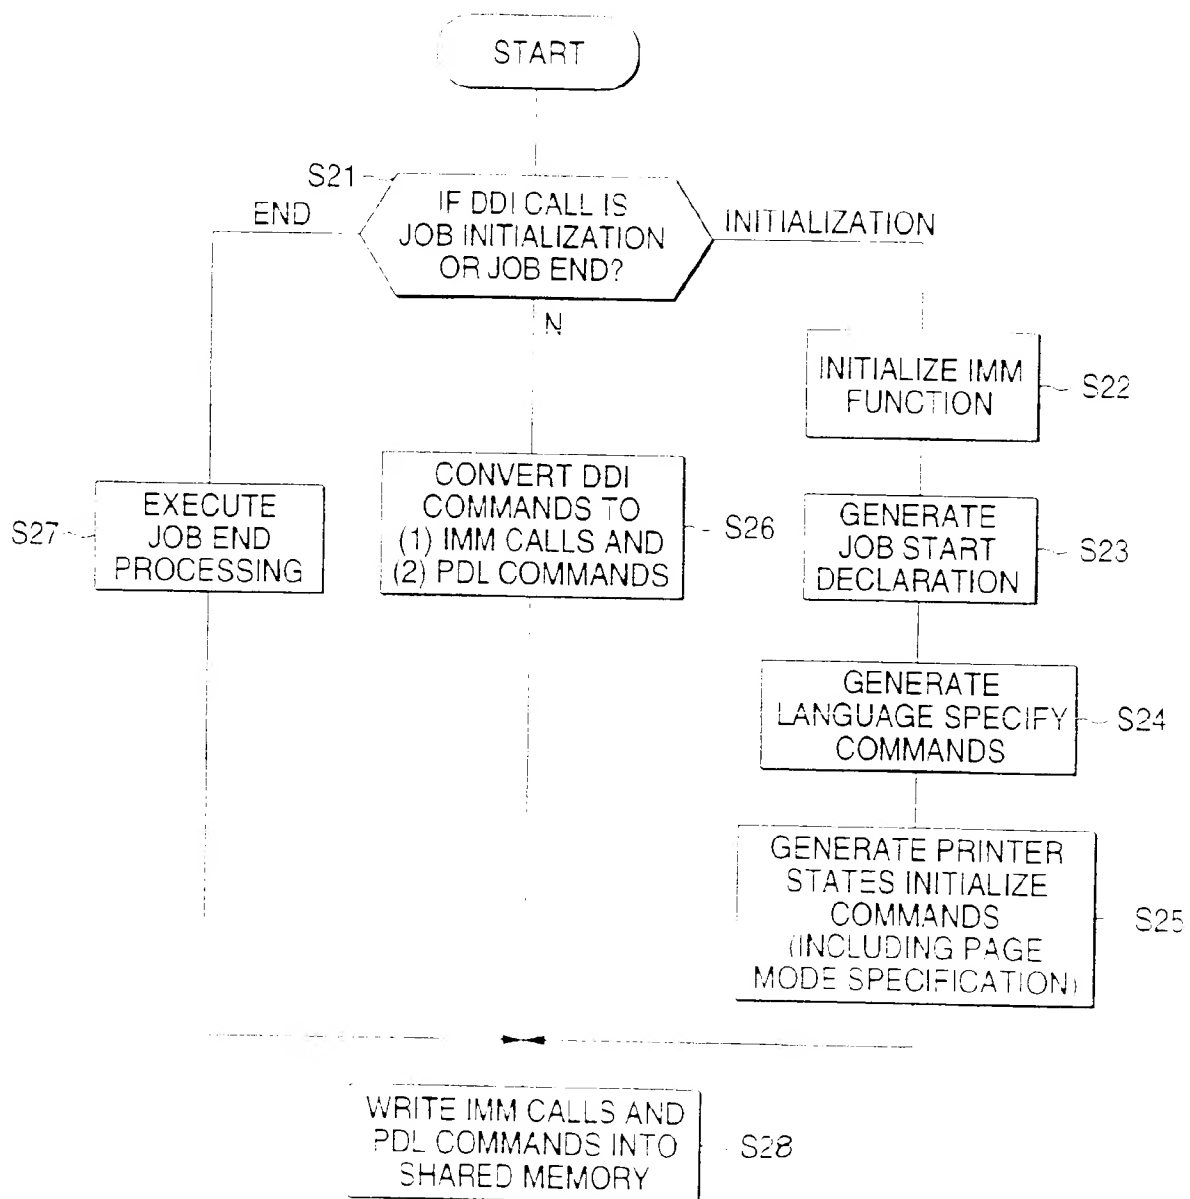


FIG. 9


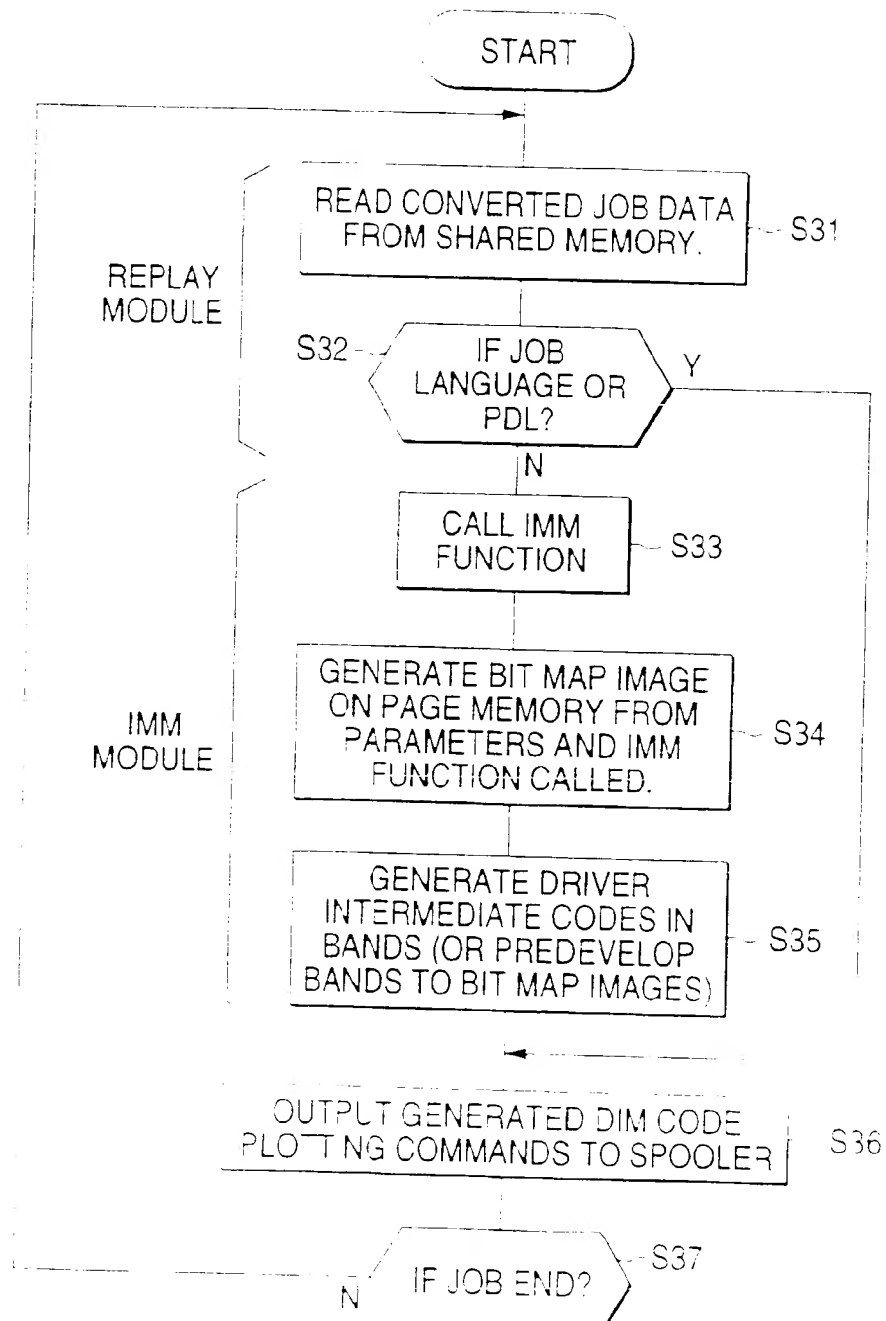


FIG. 10



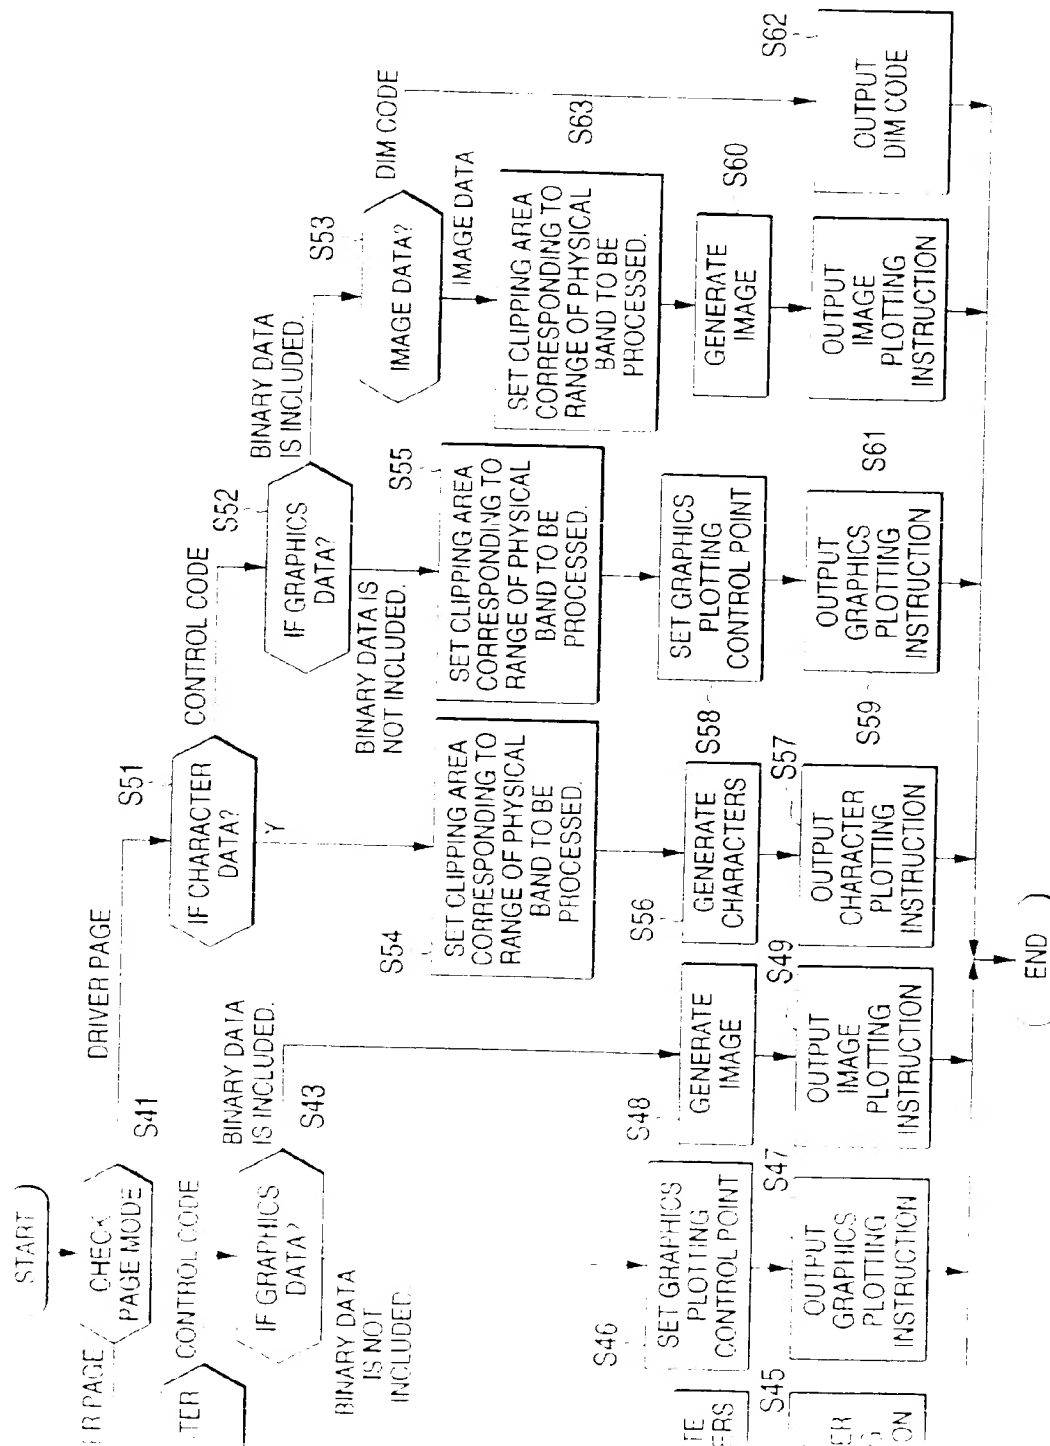

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 87 301 634

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.)
*	EP 0 659 670 A (CANON KK) * figures 1-3, 9-11 * * column 2, line 36 - column 3, line 6 * * column 7, line 47 - column 9, line 12 *	1-3, 7-12	G06F3/12 G06K15/00
A	WO 90 10370 A (EASTMAN KODAK CO) * figures 1,2 * * page 2, line 28 - page 4, line 28 *	1-4, 6-12	

TECHNICAL FIELDS
SEARCHED (Int. Cl.)

G06F
G06K

The European Patent Office has been drawn up by the

European Patent Office, 12, rue de la Loi, 1049 Brussels, Belgium

THE HAGUE 11 October 1987

By the European Patent Office, 12, rue de la Loi, 1049 Brussels, Belgium